



TOP VIEW

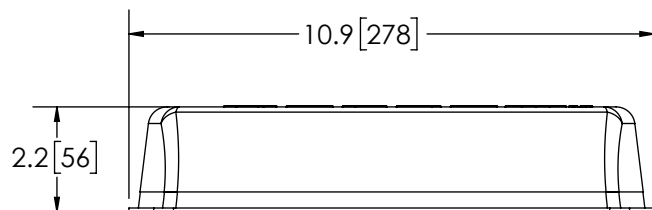

FRONT VIEW

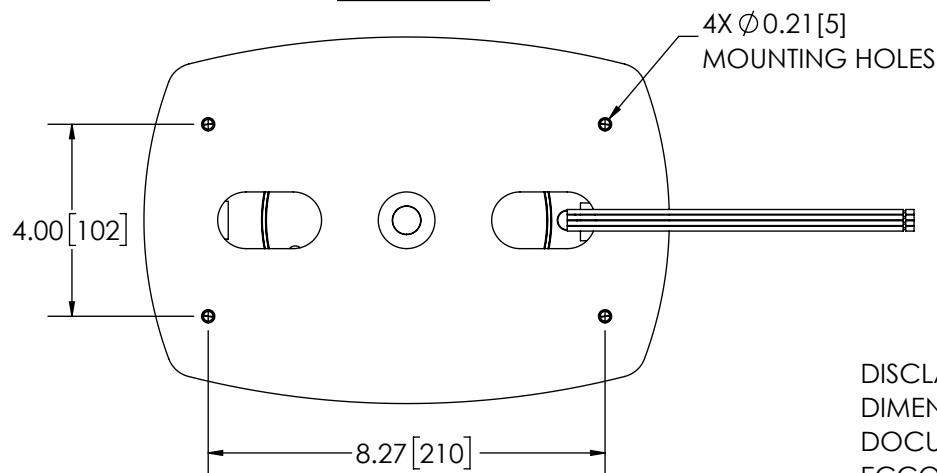

BOTTOM VIEW

COLOR CHART	
FG P/N	COLOR
5550A	AMBER

10.50 ± 0.50 [267 ± 13]

4-16 AWG WIRES
RED - POSITIVE (+)

BLACK - NEGATIVE (-)

BLUE - FLASH PATTERN SELECT (-)

YELLOW - SYNC

REVISION HISTORY		
REV.	DESCRIPTION	DATE
B	REVISE PER EL0056	2017-09-18
C	REVISE PER EL0086	2018-03-26
D	REVISE PER EL0086	2018-08-27

SPECIFICATIONS

- CERTIFICATIONS: ECE R10; AMECA/SAE J845 (JUN 2013) CLASS 1A; YELLOW; CA Title 13 CLASS E; ; Reg 65 CertE4-TA1-006639; IP6K5

Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
SINGLE : 120 ± 5 FLASHES PER MINUTE
DOUBLE : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 9-32 VDC
- CURRENT (PEAK): 3.42A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 43.8W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 4-16 AWG WIRES
- MOUNTING: 4 BOLT MOUNT KIT
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 2.0 LBS (0.9 Kg)

DISCLAIMER



DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS, AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

NOTES:

- ROHS COMPLIANT
- DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS CO. AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ELECTRONIC CONTROLS CO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2016 ELECTRONIC CONTROLS CO.

SCALE 1:4			APPROVALS		DATE												
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: A			DRAWN BY ABD		2018-07-25												
			CHECKED ABB		2018-07-26												
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG. JLA		2018-07-25												
<table><tr><th>MILLIMETERS DECIMALS</th><th>INCHES DECIMALS</th><th>ANGLES</th></tr><tr><td>XX. ± 1.0mm</td><td>X.X ± 0.1</td><td>± 0.5°</td></tr><tr><td>XX.X ± 0.5mm</td><td>X.XX ± 0.04</td><td rowspan="2">FRACTIONS ± 1/64</td></tr><tr><td></td><td>X.XXX ± 0.02</td></tr></table>			MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES	XX. ± 1.0mm	X.X ± 0.1	± 0.5°	XX.X ± 0.5mm	X.XX ± 0.04	FRACTIONS ± 1/64		X.XXX ± 0.02	ELEC. ENG. JES		2018-08-01	
			MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES												
			XX. ± 1.0mm	X.X ± 0.1	± 0.5°												
			XX.X ± 0.5mm	X.XX ± 0.04	FRACTIONS ± 1/64												
	X.XXX ± 0.02																
TEST ENG. JRT		2018-07-27															
SALES. ARS		2018-07-26		<div>ECCO[®] www.eccolink.com</div> <div>Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444</div> <div>LED MICROBAR, 11", 12-24V, PERM, CLASS I</div>													
Electronically Controlled Use Latest Copy																	
<div>THIRD ANGLE PROJECTION</div> 			CUSTOMER PART NO. SEE CHART		PRODUCT SERIES: 5500												
			SIZE: A		DWG. NO. 5550X		REV. D										
			SHEET 1 OF 1		Project: EL0056			Date Created: 2016-11-08									